

Check Valve Series

- SHCV Series
- SOCV Series
- SOACV Series
- SACV Series



High Pressure Check Valves

SHCV SERIES



Features

- Pressure rating up to 6,000psig(413bar) at 100°F (37°C)
- Temperature rating up to 375°F (190°C) with viton seal (standard)
- Cracking pressure fixed from 1/3 to 25psig (0.02 to 1.7bar)
- Variety of end connections
- 316 stainless steel body material as standard.
- Each and every valve is tested for cracking pressure and reseal performance at the factory.

Technical Data

Series	Orifice (mm)	Working and Back Pressure @70°F(20°C)	Flow Coefficient (Cv)	Nominal Cracking Pressure
SHCV1	4.8	6000psig (413bar)	0.67	1/3, 1, 5, 10, 25 psig (0.02, 0.06, 0.34, 0.68, 1.7 bar)
SHCV2	7.8		1.80	
SHCV3	15.0	5000psig (344bar)	4.70	


Seal Materials

Material	Temperature Rating	Designator
Viton	-10°F to 375°F (-23°C to 190°C)	(Blank)
NBR	-10°F to 250°F (-23°C to 121°C)	N
Ethylene Propylene	-50°F to 300°F (-45°C to 148°C)	E

Cracking Pressure and Reseal Pressure at 70°F (20°C)

Nominal Spring Size, psig(bar)	Cracking Pressure Range, psig(bar)	Min. Reseal Pressure, psig(bar)	Designator
1/3 (0.02)	0~3 (0~0.20)	6 (0.41) back pressure	0.3P
1 (0.068)	0~4 (0~0.27)	5 (0.34) back pressure	1P
5 (0.34)	3~9 (0.20~0.62)	2 (0.13) back pressure	5P
10 (0.68)	7~15 (0.48~1.0)	3 (0.20)	10P
25 (1.7)	20~30 (1.3~2.0)	17 (1.1)	25P

Materials of Construction

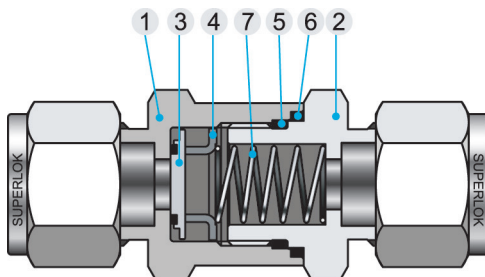

No.	Component	Material
*1	Inlet Body	A276-316
*2	Outlet Body	A276-316
*3	Poppet	Viton-bonded SS316
*4	Poppet Stopper	Stainless Steel 316
*5	O-Ring	Viton(Standard)
6	Packing	PTFE
*7	Spring	Stainless Steel 304

* Wetted components




Table of Dimensions

Part No.	Orifice	Cv Max.	End Connection	Pressure Rating psig (bar)	Dimensions mm(in.)				
					A	B	H	h	
SHCV1	S2	4.8	0.67	1/8" SUPERLOK	6000(413)	57.7	26.4	11.1(9/16)	17.5(11/16)
	S4			61.7		14.3(7/16)			
	S6M					14			
	F4N			54.1		-			
	M2N			45.5		26.4	-		
	M4N			55.1					
SHCV2	S6	7.8	1.8	3/8" SUPERLOK	6000(413)	69.9	31.2	17.5(11/16)	25.4(1)
	S8			75.2		22.2(7/8)			
	S8M			68.6		16			
	S10M			71.1		19			
	S12M			75.2		22			
	F6N			64.8		-			
	F8N			77.0					
	M6N			59.9		31.2	-		
	M8N			69.3					
	SHCV3			S12		15	4.7	3/4" SUPERLOK	
S16		98.6	38.1(1-1/2)						
S22M		88.4	32						
S25M		98.6	40						
F12N		82.0	-						
F16N		97.3							
M12N		83.6	45.5	-					
M16N		93.2							

- Dimensions and Drawings are for reference only and are subject to change without prior notice.
- Unless otherwise specified, all dimensions are in millimeters.
- Sizes, pressure classes, and end connections not listed are available upon request.
- Dimensions shown with SUPERLOK nuts finger-tight, where applicable.

Ordering information

Example : **SHCV2** - **S 10M** - **1P** - **E** - **B**

1
2
3
4
5
6

1. Valve Series

- SHCV1
- SHCV2
- SHCV3

2. End Connection

- S = SUPERLOK Tube Fitting
- M = Male Thread
- F = Female Thread

4. Cracking Pressure

- 0.3P = 1/3 psi
- 1P = 1 psi
- 5P = 5 psi
- 10P = 10 psi
- 25P = 25 psi

3. Connection Size

Fractional Tube	1/8"	1/4"	3/8"	1/2"	3/4"	1"	
	2	4	6	8	12	16	
Metric Tube	6mm	8mm	10mm	12mm	16mm	22mm	25mm
	6M	8M	10M	12M	16M	22M	25M
Thread (inch)	1/8	1/4	3/8	1/2	3/4	1	
Screwed NPT	2N	4N	6N	8N	12N	16N	
Screwed BSPT	2R	4R	6R	8R	12R	16R	

5. Seal Material

- (Blank) = Viton (Standard)
- N = NBR
- E = EPDM

6. Body Material

- (Blank) = 316 Stainless Steel
- B = Brass

※ For special sizes and configurations, please consult BMT (SUPERLOK) sales representative.

One-Piece Check Valves

SOCV SERIES

Features

- One-piece Body
- Working pressure up to 3000 psig (206bar)
- Temperature rating up to 375°F(190°C) with viton seal standard.
- Cracking pressure fixed from 1/3 to 25psig (0.02 to 1.7 bar)
- NPT and ISO pipe end connections
- 316 stainless steel body as standard
- Each and every valve is tested for cracking pressure and reseal performance at the factory.



Technical Data

Nominal Cracking Pressure	1/3, 1, 10 and 25psig (0.02, 0.06, 0.68, 1.7bar)
Maximum Working Pressure at 70°F (20°C)	3000psig (206bar)
Maximum Back Pressure at 70°F (20°C)	3000psig (206bar)
Flow Coefficient (Cv)	<ul style="list-style-type: none"> • SOCV1 / SOCV2 : 0.35 • SOCV3 / SOCV4 : 1.20
Temperature Rating	<ul style="list-style-type: none"> • VITON O-ring : -10°F to 375°F (-23°C to 190°C) • NBR O-ring : -10°F to 250°F (-23°C to 121°C)

Cracking Pressure and Reseal Pressure

SOCV Series Valves with nominal cracking pressure of 20 psig (1.3 bar) or lower may require back pressure to reseal bubble-tight.


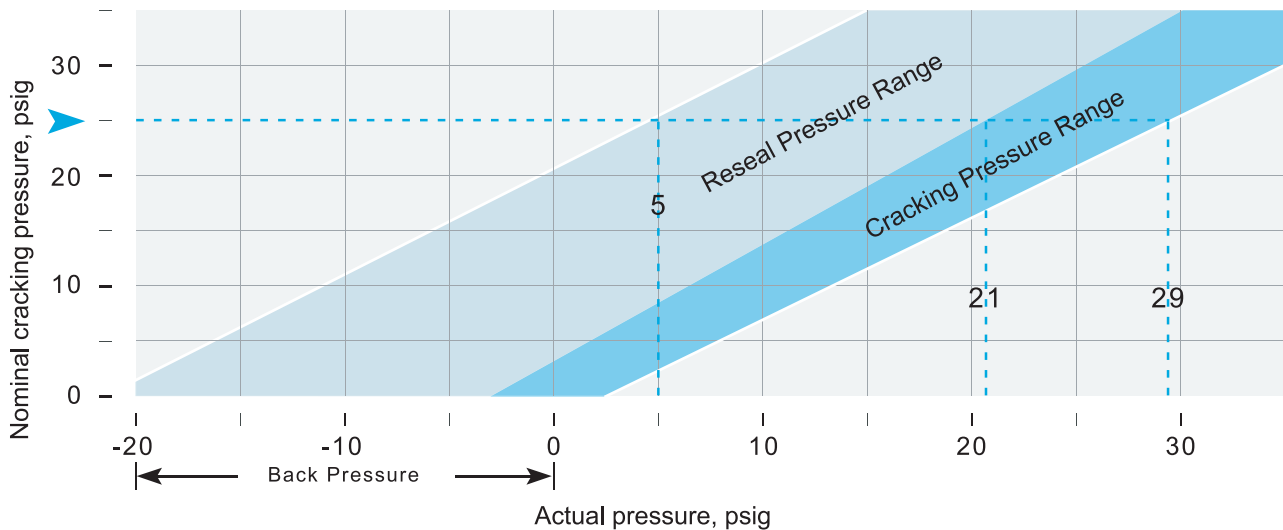



Table of Dimensions

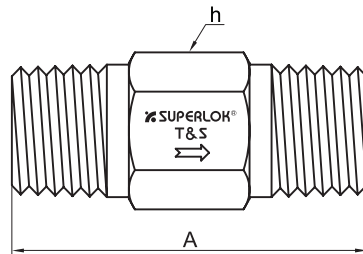

Part No.	End Connection		A	h Hex mm (in.)
	Inlet	Outlet		
SOCV1	M4N	1/4 Male NPT	41.2	14.3 (9/16)
	M4R	1/4 Male ISO		
SOCV2	F4N	1/4 Female NPT	61.2	19.1 (3/4)
	F4R	1/4 Female ISO	64.5	
	M4N-F4N	1/4 Male NPT	44.5	
	F4N-M4N	1/4 Female NPT	58.2	
SOCV3	M8N	1/2 Male NPT	57.9	22.2 (7/8)
SOCV4	F8N	1/2 Female NPT	94.2	26.9 (1-1/16)
	M8N-F8N	1/2 Male NPT	71.9	

- Dimensions and Drawings are for reference only and are subject to change without prior notice.
- Unless otherwise specified, all dimensions are in millimeters.
- Sizes, pressure classes, and end connections not listed are available upon request.
- Dimensions shown with SUPERLOK nuts finger-tight, where applicable.

Materials of Construction

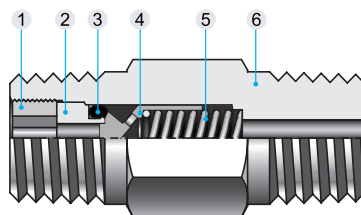

No.	Component	Valve Body Materials	
		Stainless Steel	Brass
*1	Insert Lock Screw	316SS / A276	Brass
*2	Insert	316SS / A276	Brass
*3	O-Ring	VITON	NBR
*4	Poppet	316SS / A276	Brass
*5	Spring	SS304	
*6	Body	316SS / A276	Brass

* Wetted components

Ordering information

Example : **SOCV2 - F 4N - 1P - N - B**

1
2
3
4
5
6

1. Valve Series

- SOCV1 SOCV3
 SOCV2 SOCV4

2. End Connection

- M = Male Thread
 F = Female Thread

3. Connection Size

Thread (inch)	1/4	1/2	3/4
Screwed NPT	4N	8N	12N
Screwed BSPT	4R	8R	12R

4. Cracking Pressure

- 0.3P = 1/3 psi 10P = 10 psi
 1P = 1 psi 25P = 25 psi

5. Seal Material

- (Blank) = Viton (Standard)
 N = NBR

6. Body Material

- (Blank) = 316 Stainless Steel
 B = Brass

※ For special sizes and configurations, please consult BMT (SUPERLOK) sales representative.

One-Piece Adjustable Check Valves

SOACV SERIES

Features

- One-Piece body
- Working pressure up to 3000psig (206 bar)
- Cracking pressure adjustable from 3 to 600psig (0.2 to 41.3bar)
- NPT and ISO pipe end connections in 1/4 and 1/2 in. sizes
- 316 stainless steel body as standard
- Each and every valve is tested for cracking pressure and reseal performance at the factory.



Technical Data

Description	SOACV1, SOACV2	SOACV3
Cracking Pressure Ranges	<ul style="list-style-type: none"> • 3 to 50psi (0.2 to 3.4bar) • 50 to 150psi (3.4 to 10.3bar) • 150 to 350psi (10.3 to 24.1bar) • 350 to 600psi (24.1 to 41.3bar) 	
Working and Back Pressure at 70°F (20°C)	3000psig (206bar)	
Temperature Rating	<ul style="list-style-type: none"> • VITON O-Ring : -10°F to 375°F (-23°C to 190°C) • NBR O-Ring : -10°F to 250°F (-23°C to 121°C) 	
Flow Coefficient (Cv)	0.35	1.20

Cracking and Reseal Pressure at 70°F (20°C)


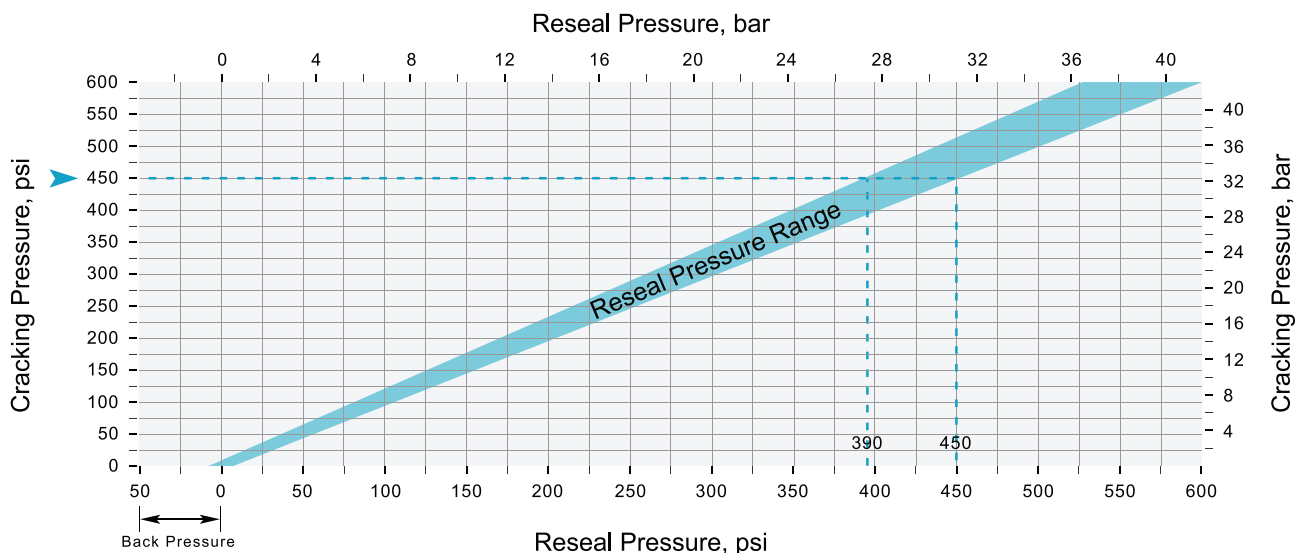



Table of Dimensions

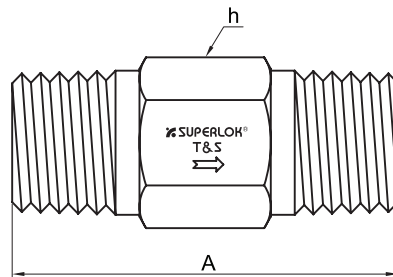

Part No.		End Connection	A	h Hex mm (in.)
SOACV1	M4N	1/4 Male NPT	41.1	14.3 (9/16)
	M4R	1/4 Male ISO	41.1	14.3 (9/16)
SOACV2	F4N	1/4 Female NPT	75.7	19.1 (3/4)
SOACV3	M8N	1/2 Male NPT	65.0	22.2 (7/8)
	M8R	1/2 Male ISO	65.0	22.2 (7/8)

- Dimensions and Drawings are for reference only and are subject to change without prior notice.
- Unless otherwise specified, all dimensions are in millimeters.
- Sizes, pressure classes, and end connections not listed are available upon request.
- Dimensions shown with SUPERLOK nuts finger-tight, where applicable.

Materials of Construction

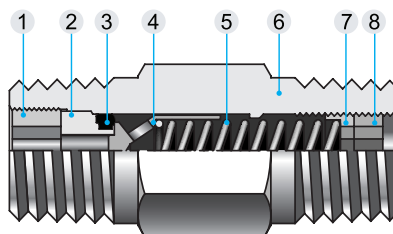

No.	Component	Valve Body Materials	
		Stainless Steel	Brass
*1	Insert Lock Screw	316SS / A276	Brass
*2	Insert	316SS / A276	Brass
*3	O-Ring	VITON	NBR
*4	Poppet	316SS / A276	Brass
*5	Spring	SS304	
*6	Body	316SS / A276	Brass
*7	Adjusting screw	316SS / A276	Brass
*8	Locking screw	316SS / A276	Brass

* Wetted components

Ordering information

Example : **SOACV1 - M 4N - A - N - B**

1
2
3
4
5
6

1. Valve Series

- SOACV1 SOACV2 SOACV3

2. End Connection

- M = Male Thread
 F = Female Thread

3. Connection Size

Thread (inch)	1/4	3/8	1/2
Screwed NPT	4N	6N	8N
Screwed BSPT	4R	6R	18R

4. Cracking Pressure

- A = 3~50psi C = 150~300psi
 B = 50~150psi D = 350~600psi

5. Seal Material

- (Blank) = Viton (Standard)
 N = NBR

6. Body Material

- (Blank) = 316 Stainless Steel
 B = Brass

※ For special sizes and configurations, please consult BMT (SUPERLOK) sales representative.

Adjustable Check Valves

SACV SERIES

Features

- Working pressures up to 3000 psig (206 bar)
- Temperature range from -10°F to 375°F (-23°C to 191°C) with Viton Seal
- Cracking pressures adjustable from 3 to 600psi (0.2 to 14.3bar)
- Variety of end connections
- 316 stainless steel body as standard
- Each and every valve is tested for cracking pressure and reseal performance at the factory.



Technical Data

Cracking Pressure Ranges	<ul style="list-style-type: none"> • 3 to 50psi (0.2 to 3.4bar) • 50 to 150psi (3.4 to 10.3bar) • 150 to 350psi (10.3 to 24.1bar) • 350 to 600psi (24.1 to 41.3bar)
Working and Back Pressure at 70°F (20°C)	3000psig (206bar)
Temperature Rating	<ul style="list-style-type: none"> • VITON O-Ring : -10°F to 375°F (-23°C to 190°C) • NBR O-Ring :-10°F to 250°F (-23°C to 121°C)
Flow Coefficient (Cv)	0.37

Cracking and Reseal Pressure at 70°F (20°C)


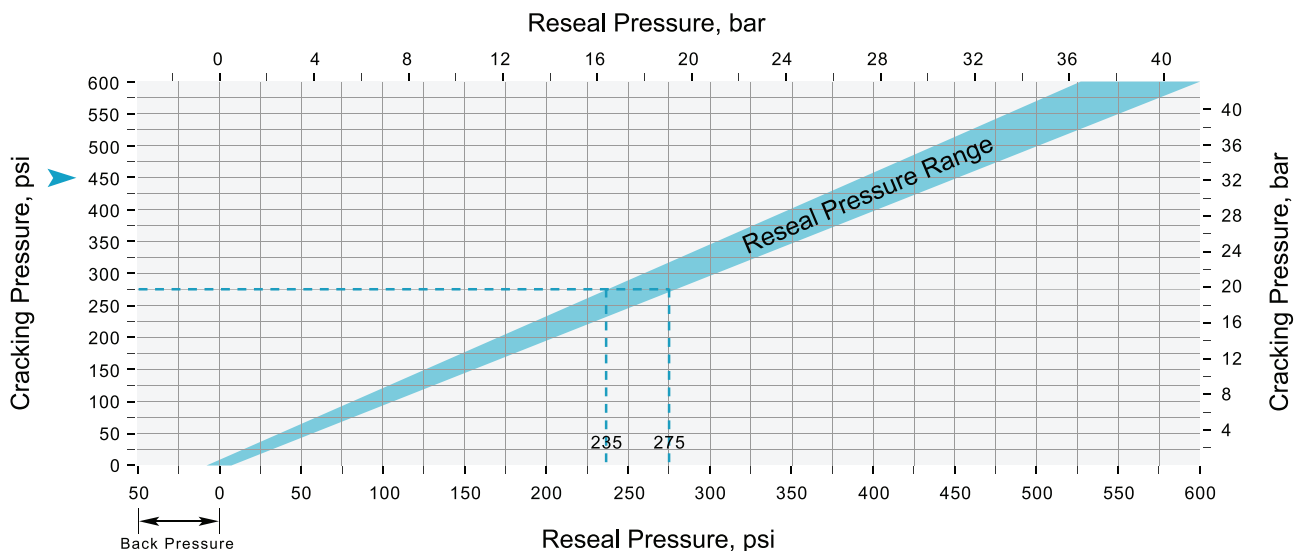



Table of Dimensions

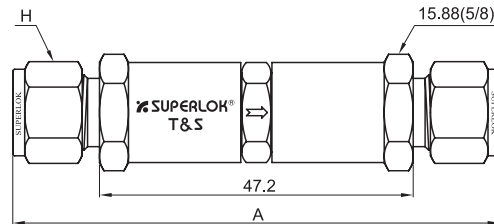

Part No.	End Connections		A (mm)	H mm(in.)
	Inlet	Outlet		
SACV	S4	1/4" SUPERLOK	82.0	14.3 (9/16)
	S6M	6mm SUPERLOK		14
	S8M	8mm SUPERLOK	84.3	16
	M4N-S4	1/4 Male NPT	79.2	14.3 (9/16)

- Dimensions and Drawings are for reference only and are subject to change without prior notice.
- Unless otherwise specified, all dimensions are in millimeters.
- Sizes, pressure classes, and end connections not listed are available upon request.
- Dimensions shown with SUPERLOK nuts finger-tight, where applicable.

Materials of Construction

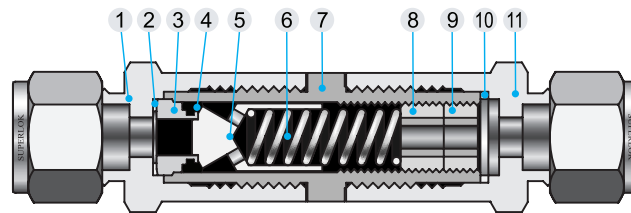

No.	Component	Valve Body Materials	
		Stainless steel	Brass
*1	Inlet body	316SS / A276	Brass
*2	Inlet gasket	PTFE - coated 316SS	
*3	Insert	316SS / A276	Brass
*4	O-Ring	VITON	NBR
*5	Poppet	316SS / A276	Brass
*6	Spring	SS304	
*7	Center body	316SS / A276	Brass
*8	Adjust screw	316SS / A276	316SS / A276
*9	Locking screw	316SS / A276	316SS / A276
*10	Outlet gasket	PTFE - coated 316SS	
*11	Outlet Body	316SS / A276	Brass

*Wetted components

Ordering information

Example :

SACV - S 6 M - A - N - B
 1 2 3 4 5

1. End Connection

- S = SUPERLOK Tube Fitting
- M = Male Thread

2. Connection Size

Size	1/4in.	3/8in.	6mm	8mm
Fractional Tube	4	6	6M	8M
Screwed NPT	4N	-	-	-
Screwed BSPT	4R	-	-	-

3. Cracking Pressure

- A = 3~50psi
- B = 50~150psi
- C = 150~300psi
- D = 350~600psi

4. Seal Material

- (Blank) = Viton
- N = NBR

5. Body Material

- (Blank) = 316 Stainless Steel
- B = Brass

※ For special sizes and configurations, please consult BMT (SUPERLOK) sales representative.

**KENMORE
CONTROLS**
FLUID CONTROL PRODUCTS

 **BMT**



Kenmore Controls
8 Industrial Way, Suite 5D
Salem, NH 03079

Phone: 603-458-1541

E-mail: sales@kenmorecontrols.com



www.kenmorecontrols.com